


2B. Perforated Box Type and (with bridge)

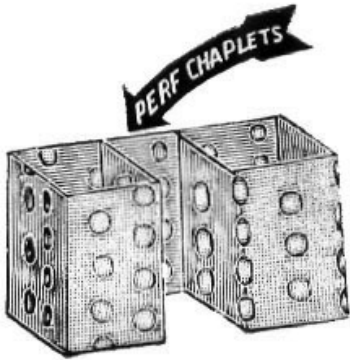

H		L	B	l	b
Nominal	Tolerance				
3	+0.20 -0.10	50	10	25	0.5
4					
5					
6	+0.30 -0.10				
7					
8					
9	+0.50 -0.10	20			
10					
12					
14					
15					
16	+0.60 -0.18	80	26	40	1.0
18					
20					
22					
24	+0.80 -0.22	100	30	50	1.5
25					
26					
28					
30					
35	+0.80 -0.22	100	30	50	1.5
40					
45					
50					